


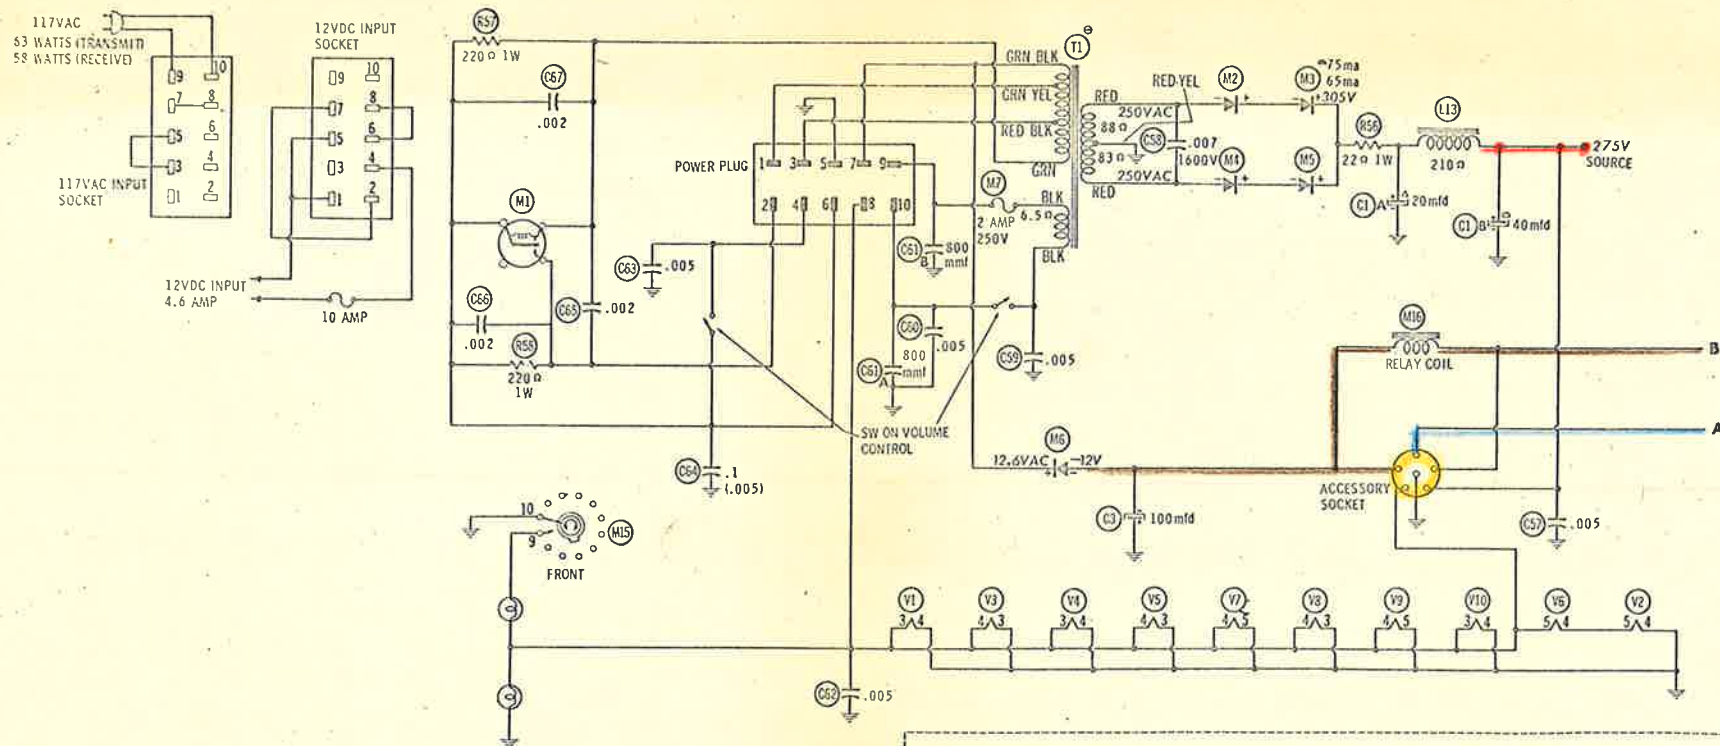

RESISTANCE READINGS


ITEM	TUBE	Pin 1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6	Pin 7	Pin 8	Pin 9
V1	12AU6	2.4 meg	0.0	FIL	110K	168K	0.0			
V2	6U8A	168K	1 meg	170K	FIL	115K	6800.0	0.0	47K	
V3	12BE6	100K	0.0	FIL	FIL	147K	180K	12.0		
V4	12BA6	1.5 meg	0.0	FIL	FIL	17000.0	147K	0.0		
V5	12AL5	1.5 meg	320K	FIL	FIL	0.0	0.0	320K		
V6	6CM8	1100K	1 meg	0.0	FIL	FIL	178K	5000.0	2200.0	470K
V7	12AX7	1285K	2.2 meg	16000.0	FIL	FIL	1470K	10 meg	35K	NC
V8	12AO5	NC	470.0	FIL	FIL	1340.0	1230.0	1 meg		
V9	12A17	123K	100K	0.0	FIL	FIL	11200.0	47K	10000.0	NC
V10	12AO5	22K	330.0	FIL	FIL	12500.0	19300.0	NC		

1. ALL MEASUREMENTS MADE IN "RECEIVE" POSITION UNLESS OTHERWISE DESIGNATED.

2. MEASURED IN "TRANSMIT" POSITION.

3. MEASURED FROM OUTPUT OF M3 AND M5.

NC NO CONNECTION

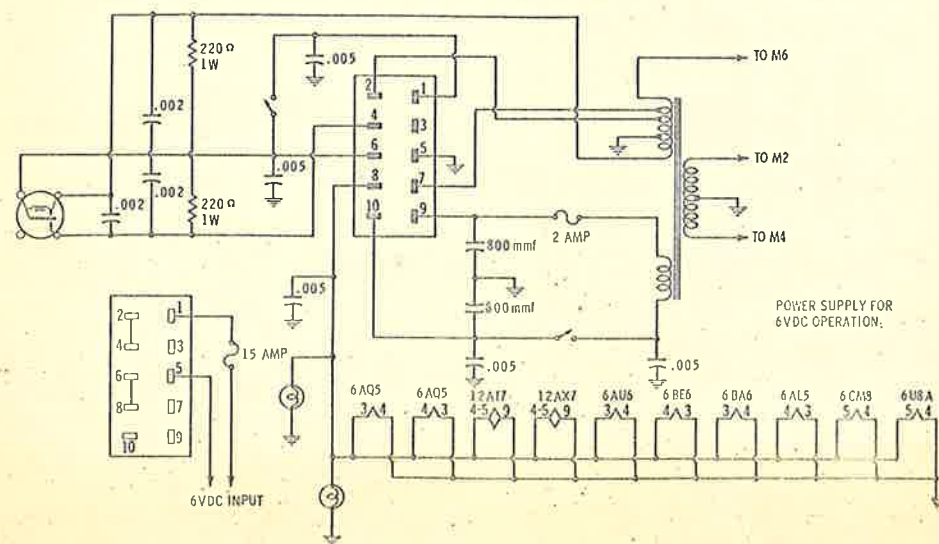

POWER SUPPLY CHASSIS For Globe CB-200